



青岛鑫瑞德机械设备有限责任公司
QINGDAO XINRUIDE MACHINERY EQUIPMENT CO.,LTD

中国 · 山东 · 青岛



诚信 · 专注 · 创新

☎ 手机：133-3639-0311 郝经理

☎ 电话/传真：0532-88265055
www.qdxinruide.en.alibaba.com

🌐 www.xinriudemachinery.com
www.pengbushebei.com

📍 地址：青岛胶州市胶北办事处香江路与地恩地大道红绿灯南50米



Company profile

QINGDAO XINRUIDE MACHINERY EQUIPMENT CO.,LTD,


was a professional and high technology manufacturer ,specializing in the research , development , production and sale for tarpaulin production equipment.Established in 2011, we have many years' experience in the machinery industry,located in beautiful seaside city-Qingdao. Our main products include tarpaulin welding machine, automatic eyelet machine,Pneumatic baling machine,automatic strapping machine...



Since its establishment , the company has always adhered to the principle of people-oriented and honest selling. We imported the advanced information technology, management method and experience from the overseas, and combined with the concrete reality of domestic enterprise. Through the efforts of entire staff, we have become the leading manufacturer in the same field of domestic.



Following the policy of high quality, reasonable price, efficient production time and satisfactory after-sales service, we have received good reputation from our domestic and oversea customers, such as India, Pakistan,Moscow and so on. Sincerely welcome the customer from all over the world.

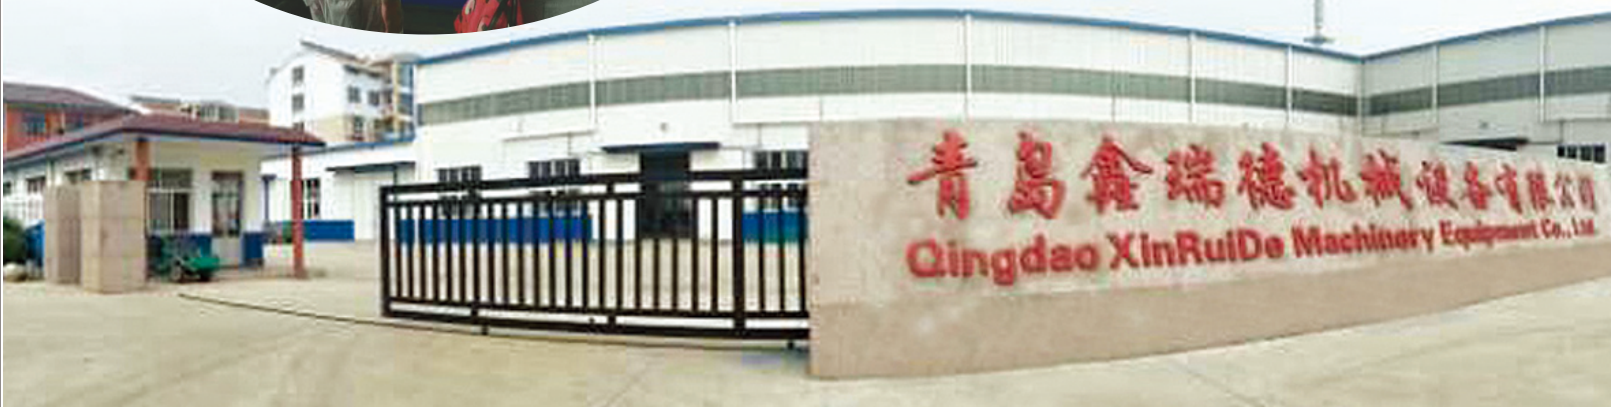

打点裁条机

Automatic dotting and slitting machine


Specification parameter

Model	RD-DC-10
Dimension	3000*1500*1000MM
Voltage	380V
Power	4KW
Weight	2000KG



Features:

There are two functions with this machine, dotting and slitting, according to customer's requirement.

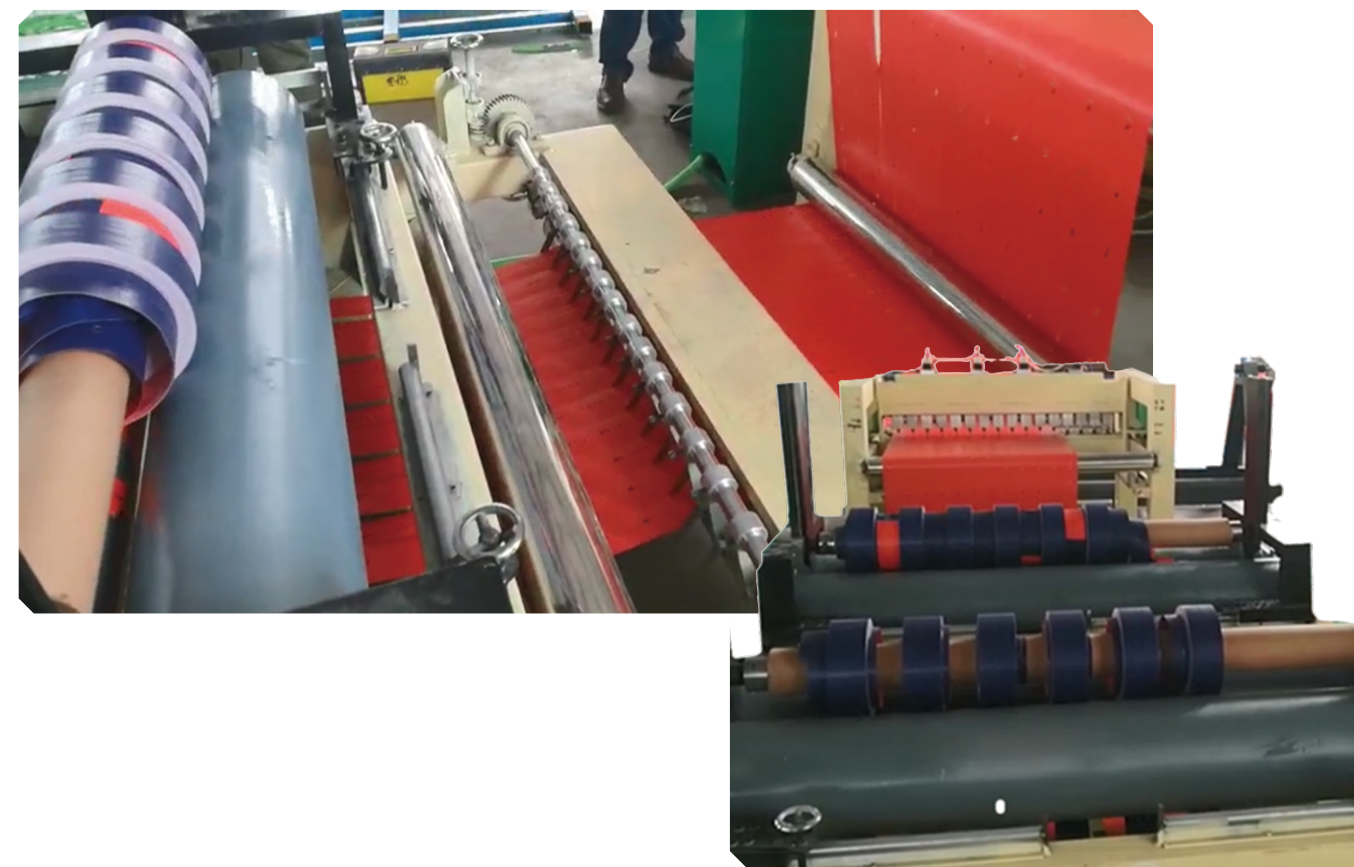

自动折布机

Fabric folding machine

Specification parameter

Model	RD-ZB-10
Power	8KW
Voltage	380V
Speed	25m/min




Features:

- A: Folding fabric speed: at least 25m/min.
- B: Folding size: 0.95~1m (can adjustment)
- C: Folding fabric height: 0.2~0.3m (can adjustment)
- D: The fabric rack is equipped with a special mind meter machine.
- E: Equipped with specified meter automatic cutting knife

热合机

Multi-pieces of head welding machines for tarpaulin

Tarpaulin welding machine mainly includes three parts:the main device(equipped several heating head), foot pedal and roller car. The number of heating head and roller car can be determined by the order requirement.

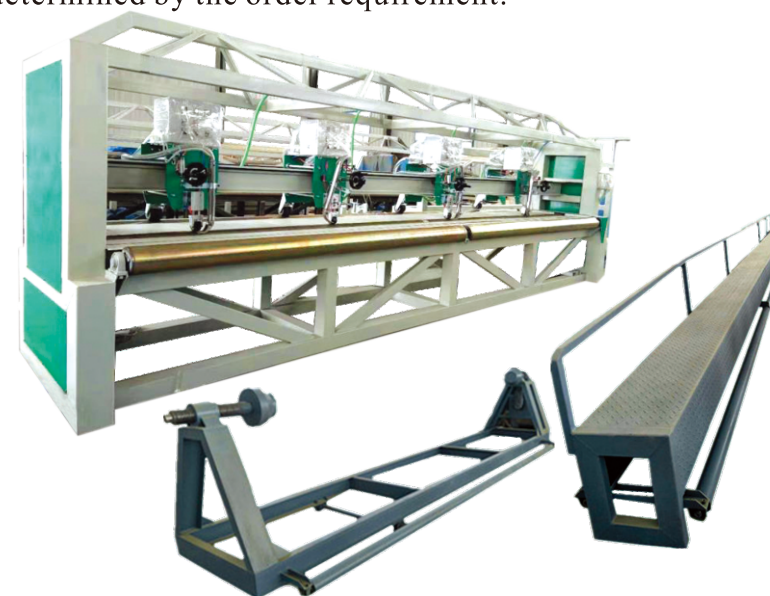

Specification parameter

Model	RD-RH-10
Voltage	380V
Power	5~8KW
Air Pressure	0.66~0.8Mpa
Welding Area	0~12m
Welding Seam	30~40mm
Welding Speed	80~100m/m

Each heating head is equipped with a fan, which uses Autonics thermostat(the South Korea brand) to control, achieving high precision temperature control, the temperature tolerance is +/- 1 degree. The main shaft is made from large diameter seamless steel pipe, which is plated with silver, ensuring the stable performance of the equipment in the high-speed operation.



Our machine equipped a specific monitor, which can start and stop the machine at once, this can be highly efficient.



全自动裁布扣机

Fully automatic eyelet and cutting machine

Usually, there are three parts with this machine:
stretched frame, eyelet button platform and cutting machine.

Functions and features:

1:stretched frame:where the raw material was put.

2:eyelet machine:

A:controlled by computer,easy to operate.



B:usually two sets of eyelet machine for one team, the number is up to customer's requirements.Equipped with automatic correction system, can automatically adjust the position according with tarpaulin movement.

3:cutting machine:

users only need to enter the material size, the computer will adjust and cut it automatically and correctly.

Specification parameter

Model	RD-CD-10
Voltage	380V
Power	7.5KW
Air Pressure	0.6~0.8Mpa
Welding Speed	0~35m/m

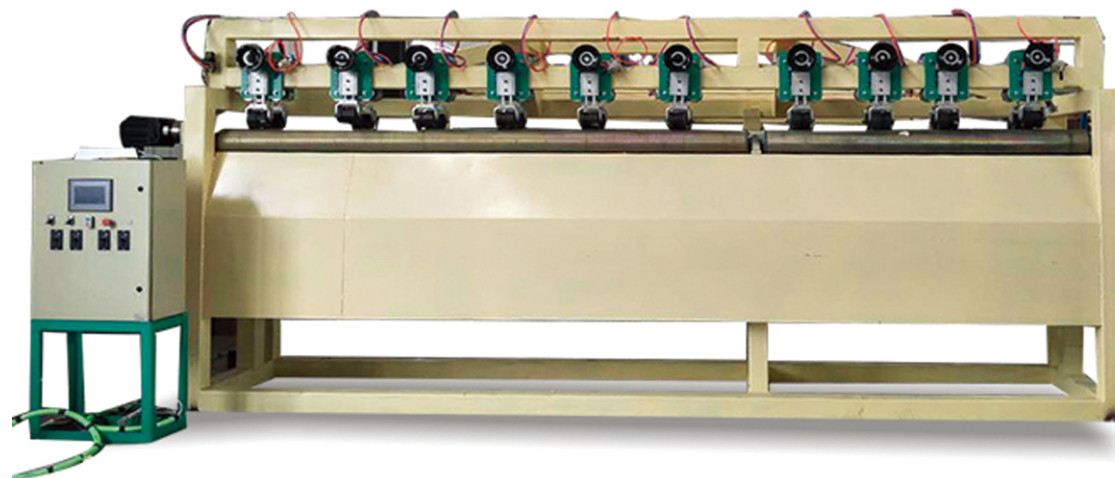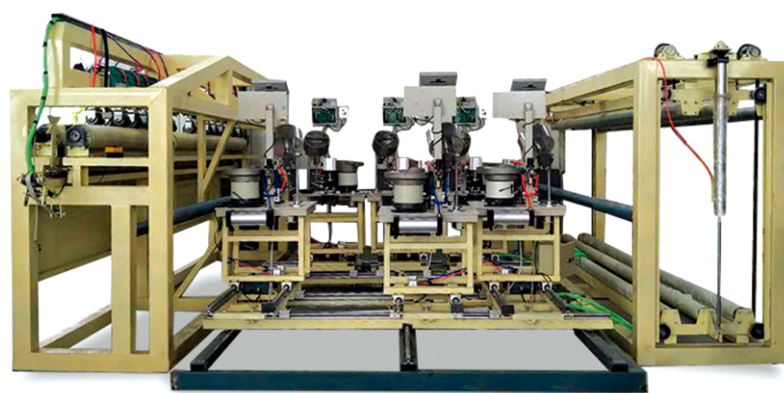

倒卷机

Automatic rewinding machine

Functions and features:

1:It is used to separate a large roll into several small rolls.

2:The host device uses 4.5KW one deceleration motor, with automatic correction function, and with a mind meter, ensure the precision.

3:Additionally,it can be equipped blades and cut into strips according to customer's special requirements.

Specification parameter

Model	RD-DL-10
Voltage	380V
Power	10KW
Dimension	2.5*1.8*1.9
Weight	2T



封口机

Semi automatic bag sealing machine

Features:

With double heating copper,aluminum plate, the newly developed technology of our company, which completely solved the problem of temperature difference between the incision and sealing, heat balance,stable performance, greatly protect the sealing neat and beautiful.

Specification parameter

Model	RD-BZ-30
Dimension	1000*500*700mm
Voltage	220V
Power	0.4KW
Weight	60KG




单面热合机

Single head welding machine

Specification parameter

Model	RD-RH-30
Dimension	700*850*1700mm
Voltage	380V
Power	6KW
Weight	150KG

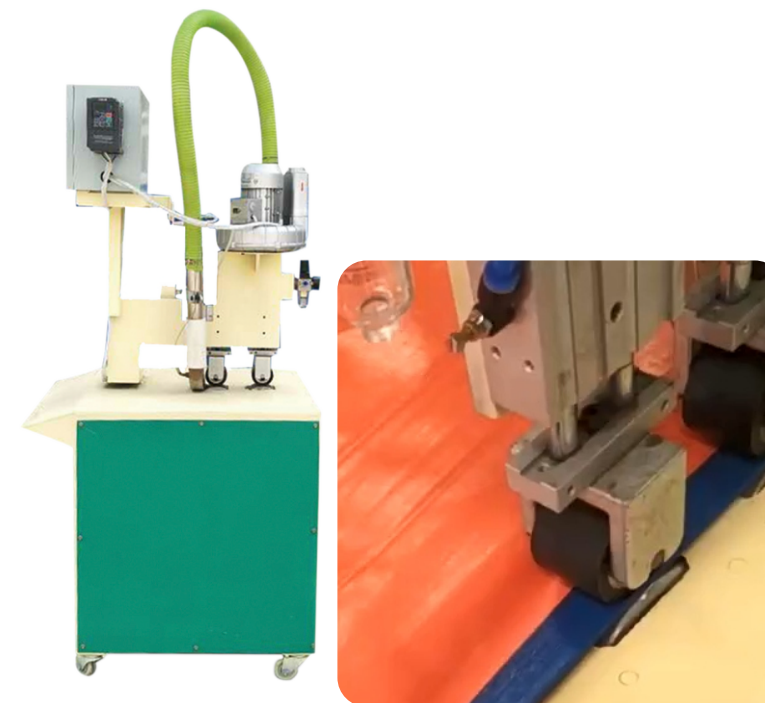

Functions and features:

The host device adopts 1.5KW frequency conversion motor,heating system uses the South Korea temperature controller and high temperature heating ceramic rod to realize intelligent temperature control.



双面热合机

Double head welding machine

Construction

There are three parts for the machine

A、double heating head



B、transport belt

C、two operating platforms



Specification parameter

Model	RD-RH-20
Voltage	380V
Power	10.4KW

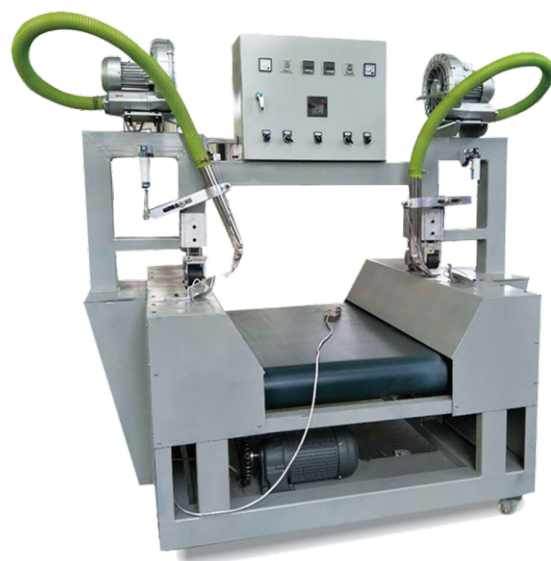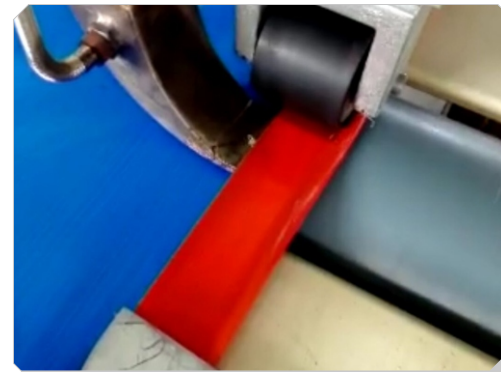

Features:


- 1、Some electrical components adopted from abroad or domestic appointed suppliers, high quality and durable.
- 2、High digital precision temperature control, temperature tolerance is +/- 1 degree.

自动打包机

Automatic strapping machine

Specification parameter

Model	RD-BZ-10
Dimension	1400*600*1540mm
Voltage	380V
Power	0.15KW
Weight	220KG
Band width	8~19mm
Binding Speed	2.3p/s

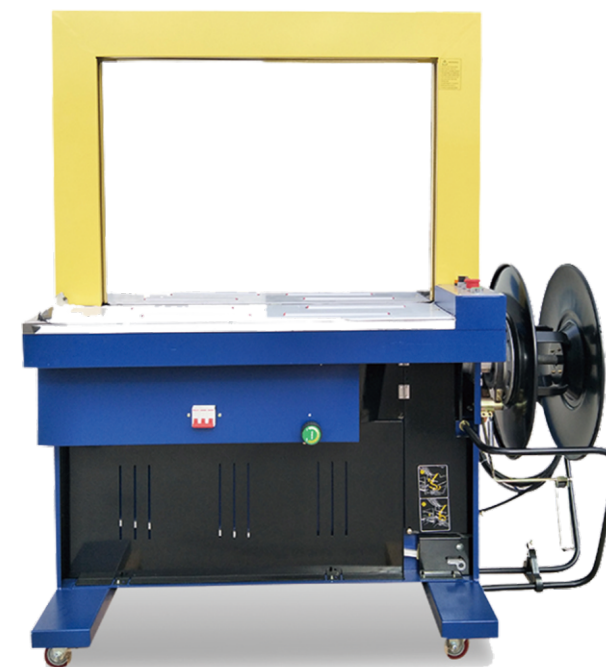

Functions and features:

- 1、Adopt imported core mechanism, stable performance.
- 2、Simple appearance and easy to operate.
- 3、High efficiency and high quality.



油 压 压 包 机

Hydraulic bale pressing machine

Features

- 1.The equipment voltage is 380v, total power 1.2kw, the cylinder is used designed material. It is the most advanced configuration in this industry. Bow frame part is thickened GB steel, more strong.
- 2.The host part adopts the South Korean brand. Fast speed and beautiful appearance.

Specification parameter

Model	RD-YB-20
Dimension	2400*1000*2500mm
Voltage	380V
Press pressure	10T
Power	1.2KW
Weight	800KG




气 压 打 扣 机

Pneumatic eyelet punching machine

It is one of our best selling products, as its easy operation and fast speed, widely welcomed by customer.

Specification parameter

Model	RD-DK-10
Dimension	800*800*1500mm
Voltage	220V
Power	0.15KW
Weight	135KG
Air pressure	0.8Mpa
Driven type	Pneumatic
Eyelet diameter	23mm(optional)
Eyelet material	plastic/copper/aluminum

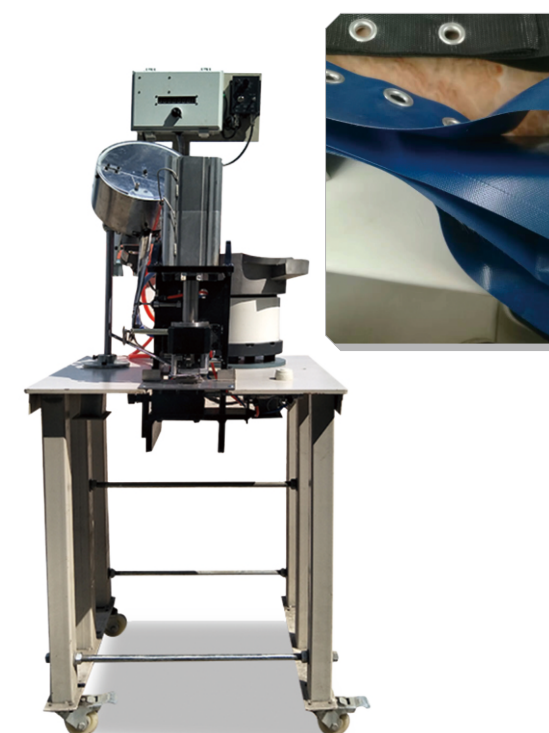

Functions and features:

- 1、 It can be widely used for banner, tent , canvas, especially for PVC pe tarpaulin. 12/23mm is our standard size of eyelet, but also depends on customer's requirement.
- 2、 Controlled by microcomputer,no longer use relay,greatly reduces the failure rate.
- 3、 The mould is made of special material, with a strong force,grinding force,smooth and beautiful play button.
- 4、 Eyelet machine with double cylinder is our patent product, which is suitable for thick fabric(heavy gsm).First punching hole, then rivet.




安全网自动机

Automatic machine for safe net

This machine includes three parts: welding machine, eyelet platform and cutting machine. It is special designed for customer, first edge welded, then eyelet punching, finally cut it automatically. All is controlled by computer, user only needs to enter the right size.

Specification parameter

Model	RD-CD-20
Voltage	380V
Power	7.5KW
Air Pressure	0.6~0.8Mpa
Welding Speed	0~35m/m

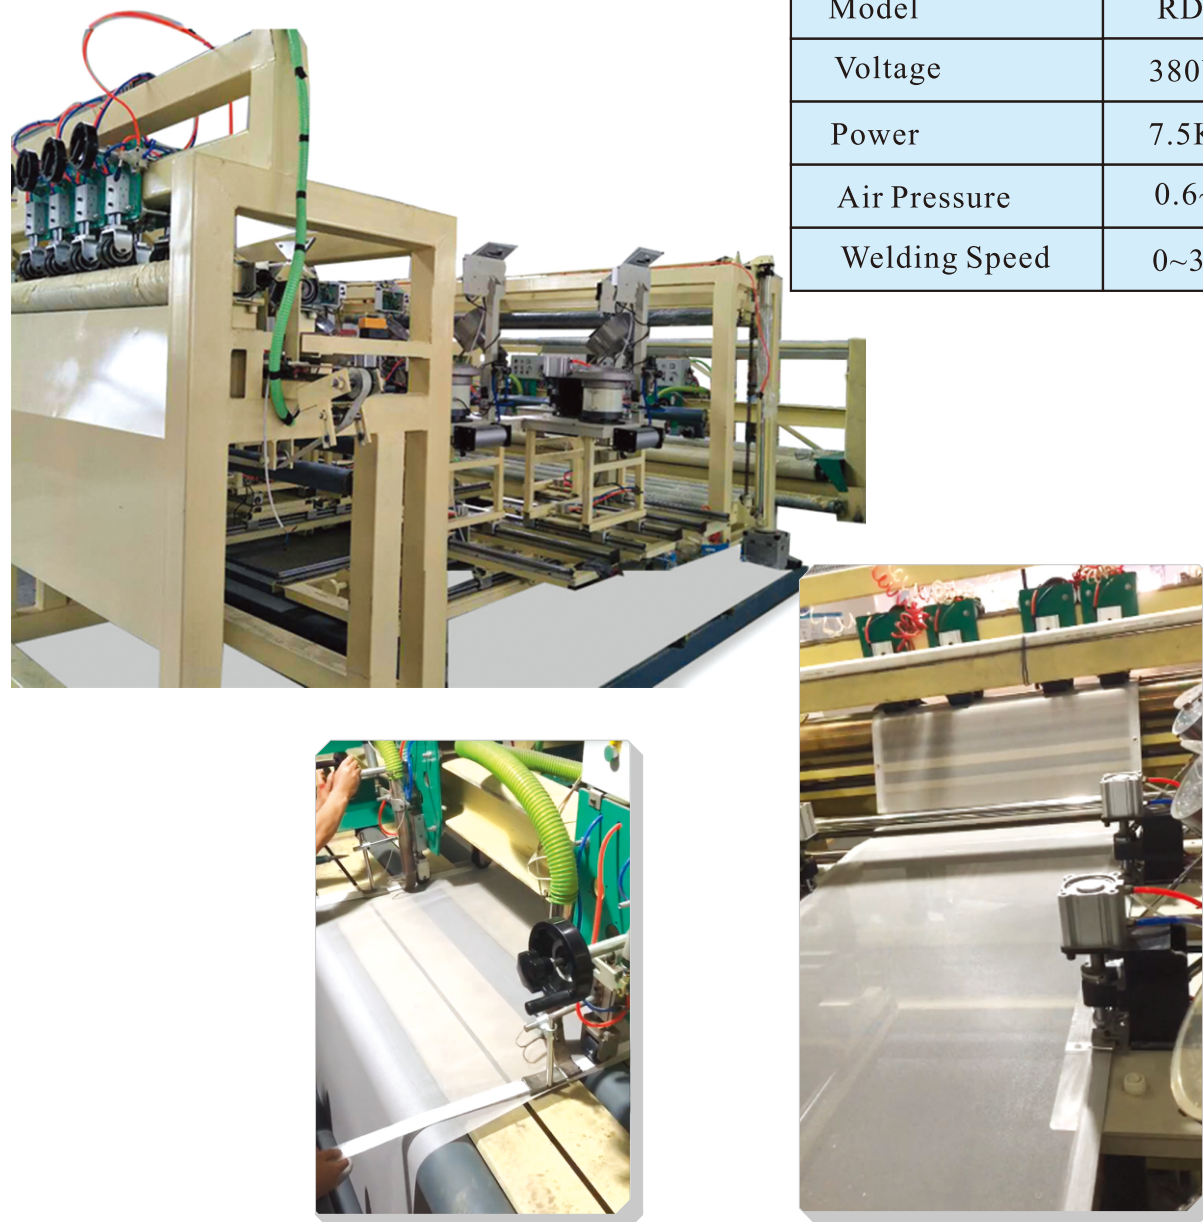

气压压包机

Pneumatic bale press machine

- 1、The core mechanism is adopted from the South Korea brand.
- 2、Double functions, first air push, then strapped with pp belt.
- 3、Easy to operate and beautiful appearance.

Specification parameter

Model	RD-BZ-20
Dimension	2200*800*2500mm
Voltage	380V
Air pressure	8Mpa
Power	1.2KW
Weight	700KG

